
PROJECTOR RANGE GUIDE

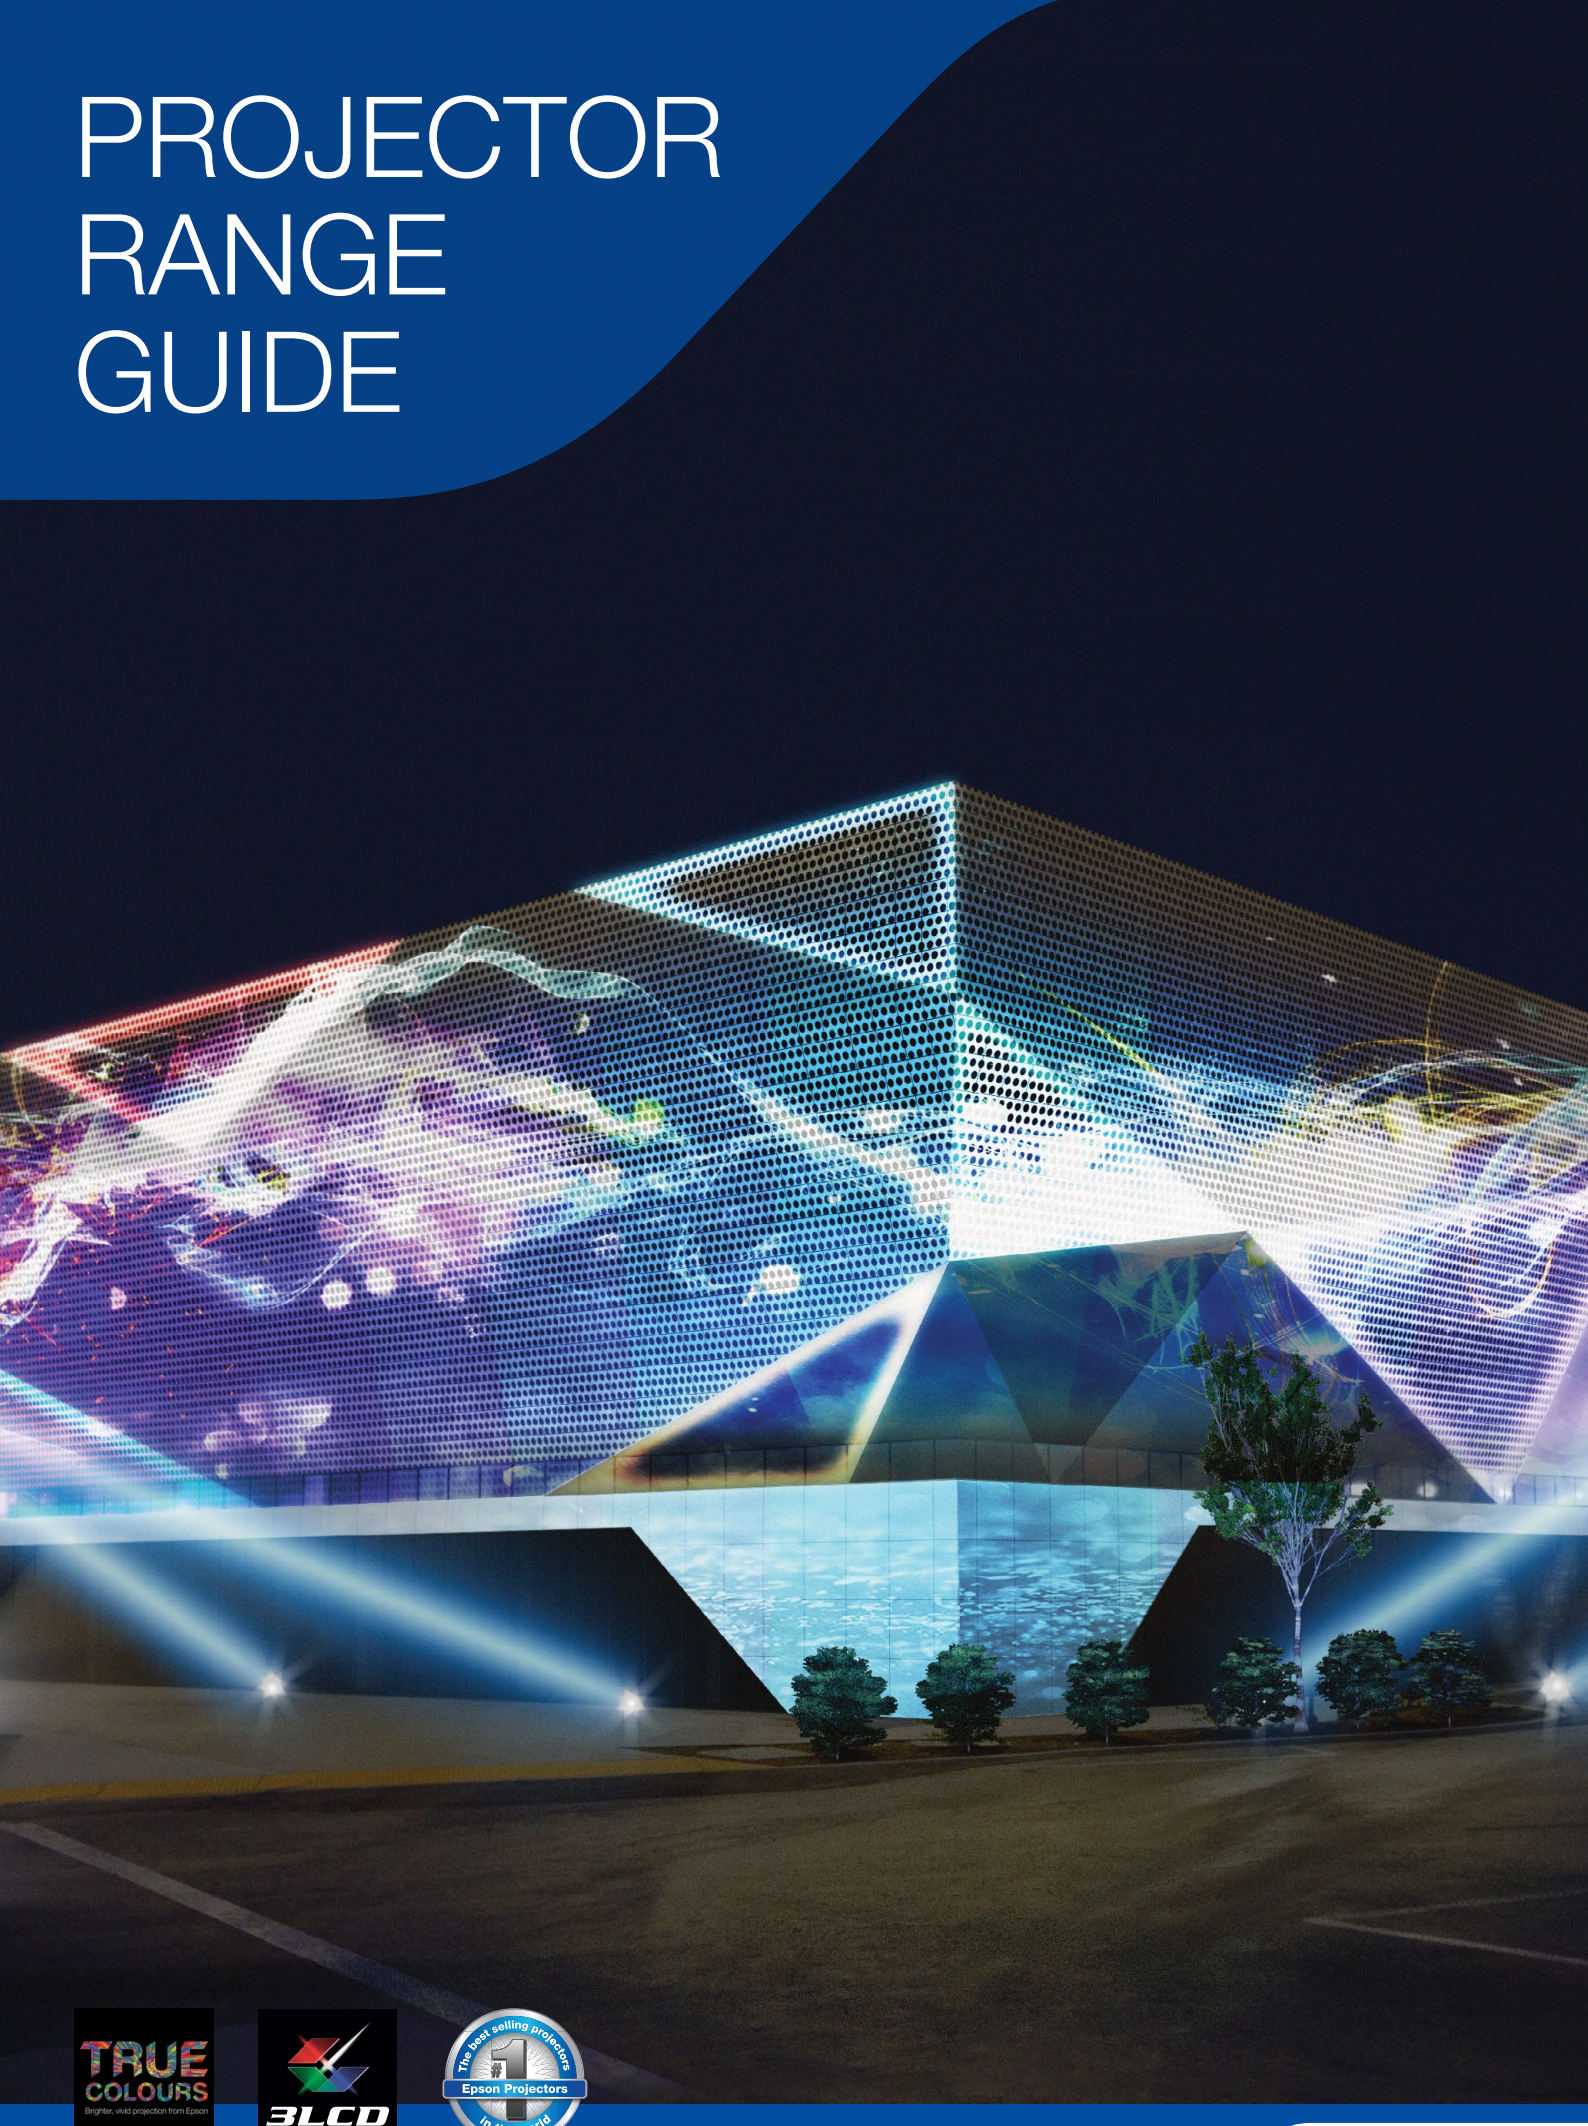

TRUE COLOURS
Brighter, vivid projection from Epson

3LCD

The best selling projectors
#1
Epson Projectors
in the world

EPSON

Note: Highlighted boxes indicate step-ups between models / within series	ENTRY BUSINESS				
					
	EB-W55	**EB-FH54**	**EB-972**	**EB-982W**	**EB-994F**
Product Code	V11HB58053	V11HB59053	V11H986053	V11H987053	V11HB60053
IMAGE					
Light Source	Lamp	Lamp	Lamp	Lamp	Lamp
Resolution	WXGA	1080p	XGA	WXGA	1080p
Colour Light Output	4,000 lm	4,100 lm	4,100 lm	4,200 lm	4,100 lm
White Light Output	4,000 lm	4,100 lm	4,100 lm	4,200 lm	4,100 lm
Native Aspect Ratio	16:10	16:9	4:3	16:10	16:9
Contrast Ratio	16,000:1	16,000:1	16,000:1	16,000:1	16,000:1
Lamp Type	210 W UHE	230 W UHE	230 W UHE	230 W UHE	230 W UHE
Keystone Correction (Standard Lens)	Vertical: ±30° Horizontal: ±30°	Vertical: ±30° Horizontal: ±30°	Vertical: ±30° Horizontal: ±30°	Vertical: ±30° Horizontal: ±30°	Vertical: ±30° Horizontal: ±30°
OPTICAL (for Standard Lens)					
Zoom	1 – 1.2 (Optical)	1 – 1.6 (Optical)	1 – 1.6 (Optical)	1 – 1.6 (Optical)	1 – 1.6 (Optical)
Screen Size	33" to 320"	31" to 304"	27" to 262"	29" to 280"	31" to 304"
Projection Distance	60" screen (1.68 – 2.02 m)	60" screen (1.73 – 2.80 m)	60" screen (1.93 – 3.14 m)	60" screen (1.79 – 2.92 m)	60" screen (1.73 – 2.80 m)
Throw Ratio	1.30 (Zoom: Wide) 1.56 (Zoom: Tele)	1.30 (Zoom: Wide) 2.09 (Zoom: Tele)	1.58 (Zoom: Wide) 2.56 (Zoom: Tele)	1.38 (Zoom: Wide) 2.24 (Zoom: Tele)	1.30 (Zoom: Wide) 2.09 (Zoom: Tele)
Focus Method	Manual	Manual	Manual	Manual	Manual
CONNECTIVITY					
Input: Video	-	-	1 x RCA (Yellow)	1 x RCA (Yellow)	1 x RCA (Yellow)
Input: Computer	1 x USB 2.0 type A, 1 x USB 2.0 type B	1 x USB 2.0 type A, 1 x USB 2.0 type B	2 x D-sub 15-pin (RGB), 1 x USB 2.0 type B	2 x D-sub 15-pin (RGB), 1 x USB 2.0 type B	2 x D-sub 15-pin (RGB), 1 x USB 2.0 type A, 1 x USB 2.0 type B
Input: Digital	2 x HDMI	2 x HDMI	2 x HDMI	2 x HDMI	2 x HDMI
Input: Audio	-	-	1 x RCA (Red / White), 2 x Stereo mini	1 x RCA (Red / White), 2 x Stereo mini	1 x RCA (Red / White), 2 x Stereo mini, 1 x Stereo mini (mic)
Control: I / O	-	-	1 x RS232C	1 x RS232C	1 x RS232C
Network: I / O	-	-	1 x RJ45, 1 x USB 2.0 type A (for Optional Wireless LAN)	1 x RJ45, 1 x USB 2.0 type A (for Optional Wireless LAN)	1 x RJ45
Wireless Connectivity	Included	Included	Optional (ELPAP11)	Optional (ELPAP11)	Included
Output: Video	-	-	1 x D-sub 15-pin	1 x D-sub 15-pin	1 x D-sub 15-pin
Output: Audio	-	1x Stereo mini	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini
ADVANCED FEATURES					
Built-in Speaker	2 W	16 W	16 W	16 W	16 W
Epson Projector Management (Network & Control)	Yes	Yes	Yes	Yes	Yes
Epson iProjection (Multi-PC Projection)	Yes	Yes	Yes	Yes	Yes
AirPlay	-	Yes	-	-	Yes
Miracast	-	Yes	-	-	Yes
Split Screen	Yes	-	Yes	Yes	Yes
Auto Keystone Correction	Vertical: ±30°	Vertical: ±30°	Vertical: ±30°	Vertical: ±30°	Vertical: ±30°
Horizontal Slide Keystone Correction	Yes	Yes	Yes	Yes	Yes
Instant Off	Yes	Yes	Yes	Yes	Yes
Direct Power On	Yes	Yes	Yes	Yes	Yes
Security	Kensington-style lock provision, password protect function				
Colour Modes	Dynamic, Presentation, Cinema, sRGB, Blackboard				
GENERAL					
Dimensions D x W x H (Including feet)	234 x 302 x 87 mm	282 x 309 x 90 mm	293 x 309 x 105 mm	293 x 309 x 105 mm	282 x 309 x 90 mm
Weight	2.6 kg	3.1 kg	3.1 kg	3.1 kg	3.1 kg
Lamp Life (Normal / Eco)	6,000 h / 12,000 h	5,500 h / 12,000 h	6,500 h / 17,000 h	6,500 h / 17,000 h	6,500 h / 17,000 h
Power Consumption: Lamp On	332 W	332 W	327 W	327 W	332 W
Power Consumption: Standby	2.0 W	-	2.0 W	2.0 W	2.0 W
Noise Level (Normal / Eco)	37 / 28 dB	37 / 28 dB	37 / 28 dB	37 / 28 dB	37 / 28 dB

Note: Highlighted boxes indicate step-ups between models / within series	PORTABLE BUSINESS		MID-RANGE BUSINESS		
					
	EB-1780W	**EB-1795F**	**EB-L260F**	**EB-L270F**	**EB-2265U**
Product Code	V11H795053	V11H796053	V11HA69053	V11HC68053	V11H814053
IMAGE					
Light Source	Lamp	Lamp	Laser Diode	Laser Diode	Lamp
Resolution	WXGA	1080p	1080p	1080p	WUXGA
Colour Light Output	3,000 lm	3,200 lm	4,600 lm	5,200 lm	5,500 lm
White Light Output	3,000 lm	3,200 lm	4,600 lm	5,200 lm	5,500 lm
Native Aspect Ratio	16:10	16:9	16:9	16:9	16:10
Contrast Ratio	10,000:1	10,000:1	2,500,000:1	5,000,000:1	15,000:1
Lamp Type	206 W UHE	214 W UHE	Laser	Laser	300 W UHE
Keystone Correction (Standard Lens)	Vertical: ±45° / Horizontal: ±30°	Vertical: ±45° / Horizontal: ±30°	Vertical: ±30° / Horizontal: ±30°	Vertical: ±30° / Horizontal: ±30°	Vertical: ±30° / Horizontal: ±30°
OPTICAL (for Standard Lens)					
Zoom	1 – 1.2 (Optical)	1 – 1.2 (Optical)	1 – 1.62 (Optical)	1 – 1.62 (Optical)	1 – 1.6 (Optical)
Screen Size	30" to 300"	30" to 300"	31" to 310"	31" to 310"	50" to 300"
Projection Distance	60" screen (1.35 – 1.62 m)	60" screen (1.35 – 1.64 m)	62" screen (1.8 m)	62" screen (1.8 m)	80" screen (2.36 – 3.92 m)
Throw Ratio	1.04 (Zoom: Wide) 1.26 (Zoom: Tele)	1.02 (Zoom: Wide) 1.23 (Zoom: Tele)	1.32 (Zoom: Wide) 2.12 (Zoom: Tele)	1.32 (Zoom: Wide) 2.12 (Zoom: Tele)	1.38 (Zoom: Wide) 2.28 (Zoom: Tele)
Focus Method	Manual	Powered	Manual	Manual	Manual
CONNECTIVITY					
Input: Video	1 x RCA (Yellow)	1 x RCA (Yellow)	1 x RCA (Yellow)	1 x RCA (Yellow)	1 x RCA (Yellow)
Input: Computer	1 x D-sub 15-pin (RGB), 1 x USB 2.0 type B		2 x D-sub 15-pin (RGB), 1 x USB 2.0 type B		
Input: Digital	1 x HDMI (1 x MHL)	1 x HDMI (1 x MHL)	2 x HDMI	2 x HDMI	2 x HDMI (1 x MHL), 1 x HDBaseT
Input: Audio	1 x Stereo mini	1 x Stereo mini	1 x RCA (Red / White), 2 x Stereo mini		
Control: I / O	1 x USB 2.0 type B	1 x USB 2.0 type B	1 x RS-232C		
Network: I / O	1 x USB 2.0 type A	1 x USB 2.0 type A	1 x RJ45, 1 x USB 2.0 type A	1 x RJ45	1 x RJ45, 1 x USB 2.0 type A
HDBaseT	-	-	-	-	Yes
Wireless Connectivity	Included	Included	Included	Optional (ELPAP11)	Included
Output: Video	-	-	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB)
Output: Audio	-	-	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini
ADVANCED FEATURES					
Built-in Speaker	1 W	1 W	16 W	16 W	16 W
Epson Projector Management (Network & Control)	Yes	Yes	Yes	Yes	Yes
Epson iProjection (Multi-PC Projection)	Yes	Yes	Yes	Yes	Yes
Miracast	-	Yes	Yes	Optional (ELPAP11)	Yes
Split Screen	Yes	Yes	Yes	Yes	Yes
Auto Keystone Correction	Vertical: ±30°	Vertical: ±30°	Vertical: ±30° / Horizontal: ±30°	Vertical: ±30° / Horizontal: ±20°	Vertical: ±30° / Horizontal: ±20°
Gesture Presenter	-	Yes	-	-	Yes
NFC (Near Field Communication)	-	Yes	-	-	-
Screen Fit	-	Yes	-	-	Yes
Instant Off	Yes	Yes	Yes	Yes	Yes
Direct Power On	Yes	Yes	Yes	Yes	Yes
Security	Kensington-style lock provision, password protect function		Padlock & security cable hole, Kensington-style lock provision, Wireless LAN unit lock, password protect function		
Colour Modes	Dynamic, Presentation, Cinema, sRGB, Blackboard, DICOM SIM		Dynamic, Presentation, Cinema, sRGB, Blackboard, DICOM SIM, Multi-Projection		Dynamic, Presentation, Cinema, sRGB, Blackboard, DICOM SIM
GENERAL					
Dimensions D x W x H (Including feet)	213 x 292 x 53 mm	213 x 292 x 53 mm	299 x 325 x 105 mm	299 x 325 x 105 mm	291 x 377 x 110 mm
Weight	1.8 kg	1.8 kg	4.2 kg	4.2 kg	4.9 kg
Light Source Life (Normal / Eco)	4,000 h / 7,000 h	4,000 h / 7,000 h	20,000 h / 30,000 h	20,000 h / 30,000 h	5,000 h / 10,000 h
Power Consumption: Lamp On	277 W	295 W	272 W	278 W	450 W
Power Consumption: Standby	2.0 W	2.0 W	2.0 W	2.0 W	2.0 W
Noise Level (Normal / Eco)	39 / 30 dB	39 / 30 dB	36 / 27 dB	38 / 28 dB	39 / 29 dB

Note: Highlighted boxes indicate step-ups between models / within series	SHORT-THROW	ULTRA-SHORT THROW			
					
	EB-L210SF	**EB-685W**	**EB-770F**	**EB-805F**	**EB-810E**
Product Code	V11HA75053	V11H744553	V11HA79053	V11H923653	V11HA99053
IMAGE					
Light Source	Laser Diode	Lamp	Laser Diode	Laser Diode	Laser Diode
Resolution	1080p	WXGA	1080p	Full HD*	1080p
Colour Light Output	4,000 lm	3,500 lm	4,100 lm	5,000 lm	5,000 lm
White Light Output	4,000 lm	3,500 lm	4,100 lm	5,000 lm	5,000 lm
Native Aspect Ratio	16:9	16:10	16:9	16:9 up to 130"	16:9
Contrast Ratio	2,500,000:1	14,000:1	2,500,000:1	2,500,000:1	2,500,000:1
Lamp Type	Laser	250 W UHE	Laser	Laser	Laser
Keystone Correction (Standard Lens)	Vertical: ±15° Horizontal: ±15°	Vertical: ±3° Horizontal: ±3°	Vertical: ±3° Horizontal: ±3°	Vertical:±3° Horizontal:±3°	-
OPTICAL (for Standard Lens)					
Zoom	1 – 1.35 (Digital)	1 – 1.35 (Digital)	1 – 1.35 (Digital)	1 – 1.35 (Digital)	1 – 1.35 (Digital)
Screen Size	55" to 125"	60" to 100"	60" to 150" @ 16:9 57" to 142" @ 21:9	65" to 130" @ 16:9 61" to 120" @ 16:6	60" to 160" @ 16:9 57" to 150" @ 21:9
Projection Distance	90" screen (0.91 m)	74.3" screen (0.44 m)	77.0" screen (0.43 m)	96" screen (0.80 m)	90" screen (0.32 m)
Throw Ratio	0.45 (Zoom: Wide) 0.61 (Zoom: Tele)	0.28 (Zoom: Wide) 0.37 (Zoom: Tele)	0.25 (Zoom: Wide) 0.35 (Zoom: Tele)	0.27 (Zoom: Wide) 0.37 (Zoom: Tele)	0.16 (Zoom: Wide) 0.22 (Zoom: Tele)
Focus Method	Manual	Manual	Manual	Manual	Manual
CONNECTIVITY					
Input: Video	1 x RCA (Yellow)	1 x RCA (Yellow)	1 x RCA (Yellow)	1 x RCA (Yellow)	-
Input: Computer	2 x D-sub 15-pin (RGB), 1 x USB 2.0 type B				1 x USB 2.0 type B
Input: Digital	2 x HDMI	3 x HDMI (1 x MHL)	3 x HDMI	3 x HDMI	2 x HDMI
Input: Audio	1 x RCA (Red / White), 2 x Stereo mini, 1 x Mic-in Stereo mini	3 x Stereo mini, 1 x Mic-in Stereo mini		3 x Stereo mini	-
Control: I / O	1 x RS-232C D-sub 9-pin	1 x RS-232C D-sub 9-pin	1 x RS-232C D-sub 9-pin	1 x RS-232C D-sub 9-pin	1 x RS-232C D-sub 9-pin
Network: I / O	1 x RJ45, 1 x USB type A (for Optional Wireless LAN)			1 x RJ45, 2 x USB type A (for Optional Wireless LAN)	
HDBaseT	-	-	-	Yes	Yes
Wireless Connectivity	Included	Optional (ELPAP10)	Included	Optional (ELPAP10)	Included
Output: Video	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB), 1 x HDMI	1 x HDMI
Output: Audio	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini	-
ADVANCED FEATURES					
Built-in Speaker	16 W	16 W	16 W	16 W	16 W
Epson Projector Management (Network & Control)	Yes	Yes	Yes	Yes	Yes
Epson iProjection (Multi-PC Projection)	Yes	Yes	Yes	Yes	Yes
4K Enhancement	-	-	-	-	Yes
Split Screen	Yes	Yes	Yes	Yes	Yes
Content Playback	Yes	Yes	Yes	Yes	Yes
High Dynamic Range	-	-	-	-	Yes
Scene Adaptive Gamma	Yes	-	Yes	-	Yes
Edgeblending	Yes	Yes	Yes	Yes	Yes
Security	Kensington-style lock provision, padlock & security cable hole, Wireless LAN unit lock, password protect function				
Colour Modes	Dynamic, Presentation, Cinema, sRGB, Blackboard, DICOM SIM, Multi-Projection				Dynamic, Presentation, Cinema, Natural, BlackBoard, DICOM SIM, Multi-Projection, Face brightness
GENERAL					
Dimensions D x W x H (Including Feet)	337 x 325 x 131 mm	400 x 367 x 187 mm	395 x 357 x 165 mm	450 x 458 x 227.5 mm	341 x 695 x 156 mm
Weight	4.6 kg	5.7 kg	5.9 kg	9.4 kg	12.5 kg
Light Source Life (Normal / Eco)	20,000 h / 30,000 h	5,000 h / 10,000 h	20,000 h / 30,000 h	20,000 h / 30,000 h	20,000 h / 30,000 h
Power Consumption: Lamp / LD On	260 W	354 W	263 W	366 W	380 W
Power Consumption: Standby	2.0 W	2.3 W	2.0 W	2.0 W	2.0 W
Noise Level (Normal / Eco)	37 / 27 dB	35 / 30 dB	37 / 27 dB	36 / 27 dB	35 / 26 dB
Projector Wall Mount	Optional (ELPMB64)	Optional (ELPMB62)	Optional (ELPMB62)	Optional (ELPMB62)	Optional (ELPMB75)

*PIXEL SHIFTING TECHNOLOGY ACHIEVES FULL HD RESOLUTION ON SCREEN

Note: Highlighted boxes indicate step-ups between models / within series	INTERACTIVE ULTRA-SHORT THROW		
			
	EB-760Wi	**EB-770Fi**	**EB-870Ei**
Product Code	V11HA80053	V11HA78053	V11HC03053
IMAGE			
Light Source	Laser Diode	Laser Diode	Laser Diode
Resolution	WXGA	1080p	1080p
Colour Light Output	4,100 lm	4,100 lm	5,000 lm
White Light Output	4,100 lm	4,100 lm	5,000 lm
Native Aspect Ratio	16:10	16:9	16:9
Contrast Ratio	2,500,000:1	2,500,000:1	5,000,000:1
Keystone Correction (Standard Lens)	Vertical: ±3° / Horizontal: ±3°	Vertical: ±3° / Horizontal: ±3°	Vertical: ±3° / Horizontal: ±3°
OPTICAL (for Standard Lens)			
Zoom	1 – 1.35 (Digital)	1 – 1.35 (Digital)	1 – 1.35 (Digital)
Screen Size	58" to 146" @ 16:9 60" to 150" @ 16:10	60" to 150" @ 16:9 57" to 142" @ 21:9	60" to 180" @16:9 57" to 171" @21:9
Projection Distance	74.3" screen (0.43 m)	76" screen (0.43 m)	77" screen (0.43 m)
Throw Ratio	0.27 (Zoom: Wide) 0.37 (Zoom: Tele)	0.25 (Zoom: Wide) 0.35 (Zoom: Tele)	0.25 (Zoom: Wide) 0.35 (Zoom: Tele)
Focus Method	Manual	Manual	Manual
CONNECTIVITY			
Input: Video	1 x RCA (Yellow)	1 x RCA (Yellow)	-
Input: Computer	2 x RGB D-sub 15-pin, 2 x USB 2.0 type B		-
Input: Digital	3 x HDMI	3 x HDMI	3 x HDMI, 1 x HDBaseT
Input: Audio	3 x Stereo mini, 1 x Mic-In Stereo mini		1 x Mic-in stereo mini
Control: I / O	1 x RS-232C D-sub 9-pin, Interactive sync stereo mini - 1 x in / 1 x out, Touch Unit control - 1 x mini DIN 8-pin		
Network: I / O	1 x RJ45, 2 x USB type A (for Optional Wireless LAN)		1 x RJ45 wired LAN
Touch Interactive	Mini DIN 8-pin	Mini DIN 8-pin	Mini DIN 8-pin
HDBaseT	-	-	Yes
Wireless Connectivity	Included	Included	Included
Output: Video	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB)	1 x HDMI (Digital Output)
Output: Audio	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini
ADVANCED FEATURES			
Built-in Speaker	16 W	16 W	16 W
Epson Projector Management (Network & Control)	Yes	Yes	Yes
Epson iProjection (Multi-PC Projection)	Yes	Yes	Yes
4k Enhancement	-	-	Yes
Interactivity	Pen Included, Finger Optional	Pen Included, Finger Optional	Pen Included, Finger Optional
Airplay	-	-	Yes
Miracast	Yes	Yes	Yes
NFC	-	-	Yes
Finger Touch Unit (FTU)	Optional (ELPFT01)		
Split Screen	Yes	Yes	Yes
Edge Blending	-	Yes	Yes
Scene Adaptive Gamma	Yes	Yes	Yes
Whiteboard Functioning	Yes	Yes	Yes
Detail Enhancement	Yes	Yes	Yes
FTU Mount	Optional (ELPMB63)		
Direct Power On / Off	Yes	Yes	Yes
Security	Kensington-style lock provision, padlock & security cable hole, Wireless LAN unit lock, password protect function		
GENERAL			
Dimensions D x W x H (Including feet)	395 x 357 x 165 mm	395 x 357 x 165 mm	395 x 376 x 172 mm
Weight	6 kg	6 kg	7.2 kg
Light Source Life (Normal / Eco)	20,000 h / 30,000 h	20,000 h / 30,000 h	20,000 h / 30,000 h
Power Consumption: LD On	263 W	263 W	302 W
Power Consumption: Standby	2.0 W	2.0 W	2.0 W
Noise Level (Normal / Eco)	37 / 27 dB	37 / 27 dB	33 / 26 dB
Projector Wall Mount	Optional (ELPMB62)		Optional (ELPMB89)

Note: Highlighted boxes indicate step-ups between models / within series	LARGE VENUE			
				
	EB-L690U	**EB-L790U**	**EB-L890U**	**EB-L895U**
Product Code	V11HB29053BU	V11HB28053BU	V11HB27053BU	V11HB27153BU
IMAGE				
Light Source	Laser Diode	Laser Diode	Laser Diode	Laser Diode
Resolution	WUXGA	WUXGA	WUXGA	WUXGA
Colour Light Output	6,500 lm	7,300 lm	8,000 lm	8,000 lm
White Light Output	6,500 lm	7,300 lm	8,000 lm	8,000 lm
Native Aspect Ratio	16:10	16:10	16:10	16:10
Contrast Ratio	5,000,000:1	5,000,000:1	5,000,000:1	5,000,000:1
LD Input Power	244 W	270 W	322 W	322 W
Keystone Correction (Standard Lens)	Vertical: ±30° / Horizontal: ±30°			
Lens Shift (Standard Lens)	Vertical: ±50% / Horizontal: ±20%			
OPTICAL (for Standard Lens)				
Zoom	1 – 1.6 (Optical)	1 – 1.6 (Optical)	1 – 1.6 (Optical)	1 – 1.6 (Optical)
Screen Size	50" to 500"	50" to 500"	50" to 500"	50" to 500"
Projection Distance	80" screen (2.33 – 3.78 m)			
Throw Ratio	1.35 (Zoom: Wide) / 2.20 (Zoom: Tele)			
Focus Method	Manual	Manual	Manual	Manual
CONNECTIVITY				
Input: Computer	2 x USB type A (for PC free, document camera) / 1 x USB type B (firmware update)			
Input: Digital	2 x HDMI, 1 x HDBaseT	2 x HDMI, 1 x HDBaseT	2 x HDMI, 1 x HDBaseT	2 x HDMI, 1 x HDBaseT
Input Control: I / O	1 x RS-232C	1 x RS-232C	1 x RS-232C	1 x RS-232C
Network I / O	1 x RJ45			
HDBaseT	Yes	Yes	Yes	Yes
Wireless Connectivity	Built-in	Built-in	Built-in	Built-in
Output: Digital	1 x HDMI	1 x HDMI	1 x HDMI	1 x HDMI
Output: Audio	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini
ADVANCED FEATURES				
Built-in Speaker	10 W	10 W	10 W	10 W
NFC	Yes	Yes	Yes	Yes
Epson Projector Management (Network & Control)	Yes	Yes	Yes	Yes
Epson iProjection (Multi-PC Projection)	Yes	Yes	Yes	Yes
Epson Projector Professional Tool	Yes	Yes	Yes	Yes
Epson Projector Content Manager	Yes	Yes	Yes	Yes
Wireless LAN Enterprise Security	Yes	Yes	Yes	Yes
Miracast	Yes	Yes	Yes	Yes
Split Screen	Yes	Yes	Yes	Yes
Detail Enhancement	Yes	Yes	Yes	Yes
Scene Adaptive Gamma	Yes	Yes	Yes	Yes
360 Degrees Projection	Yes	Yes	Yes	Yes
Content Playback	Yes	Yes	Yes	Yes
Security	Kensington-style lock provision, Wireless LAN Unit Lock, Padlock & security cable hole			
GENERAL				
Dimensions D x W x H (Including Feet)	340 x 440 x 138 mm	340 x 440 x 138 mm	340 x 440 x 138 mm	340 x 440 x 138 mm
Weight	8.2 kg	8.2 kg	8.5 kg	8.5 kg
Power Consumption: LD On	399 W	399 W	450 W	450 W
Power Consumption: Standby	2.4 W	2.4 W	2.4 W	2.4 W
Noise Level (Normal/Eco)	32 / 25 dB	34 / 25 dB	36 / 26 dB	36 / 26 dB

Note: Highlighted boxes indicate step-ups between models / within series	LARGE VENUE			
				
	EB-L690SE	**EB-L790SU**	**EB-L795SE**	**EB-L890E**
Product Code	V11HB36053BU	V11HB30053BU	V11HB26153BU	V11HB24053BU
IMAGE				
Light Source	Laser Diode	Laser Diode	Laser Diode	Laser Diode
Resolution	WUXGA (4KE)	WUXGA	WUXGA (4KE)	WUXGA (4KE)
Colour Light Output	6,000 lm	7,000 lm	7,000 lm	8,000 lm
White Light Output	6,000 lm	7,000 lm	7,000 lm	8,000 lm
Native Aspect Ratio	16:10	16:10	16:10	16:10
Contrast Ratio	5,000,000:1	5,000,000:1	5,000,000:1	5,000,000:1
LD Input Power	292 W	322 W	322 W	322 W
Keystone Correction (Standard Lens)	Vertical: ±30° / Horizontal: ±30°			
Lens Shift (Standard Lens)	Vertical: ±50% / Horizontal: ±20%			
OPTICAL (for Standard Lens)				
Zoom	1 – 1.4 (Optical)	1 – 1.7 (Optical)	1 – 1.7 (Optical)	1 – 1.6 (Optical)
Screen Size	100" to 500"	60" to 400"	60" to 400"	50" to 500"
Projection Distance	100" screen (1.08 – 1.54 m)	80" screen (1.37 – 2.34 m)	80" screen (1.37 – 2.34 m)	80" screen (2.39 – 3.90 m)
Throw Ratio	0.50 (Zoom: Wide) / 0.07 (Zoom: Tele)	0.79 (Zoom: Wide) / 1.36 (Zoom: Tele)	0.79 (Zoom: Wide) / 1.36 (Zoom: Tele)	1.35 (Zoom : Wide) / 2.20 (Zoom : Tele)
Focus Method	Manual	Manual	Manual	Manual
CONNECTIVITY				
Input: Computer	2 x USB type A (for PC free, document camera) / 1 x USB type B (firmware update)			
Input: Digital	2 x HDMI, 1 x HDBaseT	2 x HDMI, 1 x HDBaseT	2 x HDMI, 1 x HDBaseT	2 x HDMI, 1 x HDBaseT
Input Control: I / O	1 x RS-232C	1 x RS-232C	1 x RS-232C	1 x RS-232C
Network I / O	1 x RJ45			
HDBaseT	Yes	Yes	Yes	Yes
Wireless Connectivity	Optional (ELPAP11*)	Built-in	Built-in	Built-in
Output: Digital	1 x HDMI	1 x HDMI	1 x HDMI	1 x HDMI
Output: Audio	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini
ADVANCED FEATURES				
Built-in Speaker	-	10 W	10 W	10 W
4K Enhancement	Yes	-	Yes	Yes
Epson Projector Management (Network & Control)	Yes	Yes	Yes	Yes
Epson iProjection (Multi-PC Projection)	Yes	Yes	Yes	Yes
Epson Projector Professional Tool	Yes	Yes	Yes	Yes
Epson Projector Content Manager	Yes	Yes	Yes	Yes
AirPlay	-	Yes	Yes	Yes
Miracast	-	Yes	Yes	Yes
Split Screen	Yes	Yes	Yes	Yes
Detail Enhancement	Yes	Yes	Yes	Yes
Scene Adaptive Gamma	Yes	Yes	Yes	Yes
360 Degrees Projection	Yes	Yes	Yes	Yes
Content Playback	Yes	Yes	Yes	Yes
Security	Kensington-style lock provision, Wireless LAN Unit Lock, Padlock & security cable hole			
GENERAL				
Dimensions D x W x H (Including Feet)	368 x 440 x 151 mm	362 x 440 x 151 mm	362 x 440 x 151 mm	340 x 440 x 138 mm
Weight	9.3 kg	9.2 kg	9.3 kg	8.5 kg
Power Consumption: LD On	415 W	450 W	450 W	450 W
Power Consumption: Standby	2.4 W	2.4 W	2.4 W	2.4 W
Noise Level (Normal/Eco)	36 / 26 dB	36 / 26 dB	36 / 26 dB	36 / 26 dB

*WI-FI CONNECTIVITY AVAILABLE ONLY WITH ELPAP11.

Note: Highlighted boxes indicate step-ups between models / within series	LARGE VENUE				
					
	EB-PU1007WNL	**EB-PU1008WNL**	**EB-PU1008BNL**	**EB-PU2010WNL**	**EB-PU2010BNL**
Product Code	V11HA34953BU	V11HA33953BU	V11HA33853BU	V11HA52953BU	V11HA52853BU
IMAGE					
Light Source	Laser Diode	Laser Diode	Laser Diode	Laser Diode	Laser Diode
Resolution	WUXGA	WUXGA	WUXGA	WUXGA	WUXGA
Colour Light Output	7,000 lm	8,500 lm	8,500 lm	10,000 lm	10,000 lm
White Light Output	7,000 lm	8,500 lm	8,500 lm	10,000 lm	10,000 lm
Native Aspect Ratio	16:10	16:10	16:10	16:10	16:10
Contrast Ratio	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1
LD Input Power	291 W	372 W	372 W	388 W	388 W
Referenced Standard Lens	ELPLM08	ELPLM08	ELPLM08	ELPLM15	ELPLM15
Keystone Correction (Standard Lens)	Vertical: ±45° / Horizontal: ±30°				
Lens Shift (Standard Lens)	Vertical: ±67% / Horizontal: ±30%			Vertical: ±60% / Horizontal: ±18%	
OPTICAL (for Standard Lens)					
Zoom	1 – 1.6 (Optical)	1 – 1.6 (Optical)	1 – 1.6 (Optical)	1 – 1.6 (Optical)	1 – 1.6 (Optical)
Screen Size	50" to 1000"	50" to 1000"	50" to 1000"	60" to 1000"	60" to 1000"
Projection Distance	100" screen (3.11 – 5 m)			100" screen (3.38 – 5 m)	
Throw Ratio	1.44 (Zoom: Wide) / 2.32 (Zoom: Tele)			1.57 (Zoom: Wide) / 2.56 (Zoom: Tele)	
Focus Method	Powered	Powered	Powered	Powered	Powered
CONNECTIVITY					
Input: Computer	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB)
Input: Digital	1 x HDMI, 1 x DVI-D, 1 x HDBaseT			1 x HDMI, 1 x DVI-D, 1 x HDBaseT	
Input: SDI	-	-	-	1 x BNC (3G-SDI)	1 x BNC (3G-SDI)
Control: I / O	1 x RS232C, 1 x Stereo mini	1 x RS232C, 1 x Stereo mini	1 x RS232C, 1 x Stereo mini	1 x RS232C, 1 x Stereo mini	1 x RS232C, 1 x Stereo mini
Network: I / O	1 x RJ45, 1 x USB type A (for Optional Wireless LAN)				
HDBaseT	Yes	Yes	Yes	Yes	Yes
Wireless Connectivity	Optional (ELPAP11)	Optional (ELPAP11)	Optional (ELPAP11)	Optional (ELPAP11)	Optional (ELPAP11)
Output: Digital	-	-	-	1 x BNC (3G-SDI)	1 x BNC (3G-SDI)
Output: Audio	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini
ADVANCED FEATURES					
Epson Projector Management (Network & Control)	Yes	Yes	Yes	Yes	Yes
Epson iProjection (Multi-PC Projection)	Yes	Yes	Yes	Yes	Yes
Epson Professional Tool	Yes	Yes	Yes	Yes	Yes
Remote Access Camera	Yes (with Optional ELPEC01)	Yes (with Optional ELPEC01)	Yes (with Optional ELPEC01)	Yes (with Optional ELPEC01)	Yes (with Optional ELPEC01)
External Air Filter (High capacity)	Optional (ELPAF63)	Optional (ELPAF63)	Optional (ELPAF63)	Optional (ELPAF63)	Optional (ELPAF63)
Wireless LAN Enterprise Security	Yes (with Optional Wireless LAN Unit)				
4K Enhancement	Yes	Yes	Yes	Yes	Yes
Art-Net	Yes	Yes	Yes	Yes	Yes
Lens Position Memory	Yes (10 positions)	Yes (10 positions)	Yes (10 positions)	Yes (10 positions)	Yes (10 positions)
Split Screen	Yes	Yes	Yes	Yes	Yes
Edge Blending	Yes	Yes	Yes	Yes	Yes
Curved Screen Projection	Yes	Yes	Yes	Yes	Yes
Frame Interpolation	Yes	Yes	Yes	Yes	Yes
Super-resolution	Yes	Yes	Yes	Yes	Yes
Detail Enhancement	Yes	Yes	Yes	Yes	Yes
360 Degrees Projection	Yes	Yes	Yes	Yes	Yes
Security	Kensington-style lock provision, Wireless LAN Unit Lock, Security cable hole				
Colour Modes	Dynamic, Presentation, Cinema, BT.709, Natural, DICOM SIM, Multi-Projection				
GENERAL					
Dimensions D x W x H (Including Feet)	436 x 545 x 189 mm	436 x 545 x 189 mm	436 x 545 x 189 mm	436 x 545 x 189 mm	436 x 545 x 189 mm
Weight	16.4 kg	16.4 kg	16.4 kg	17.0 kg	17.0 kg
Power Consumption: LD On	366 W	452 W	452 W	452 W	452 W
Noise Level (Normal/Eco)	34 / 30 dB	36 / 30 dB	36 / 30 dB	37 / 30 dB	37 / 30 dB

Note: Highlighted boxes indicate step-ups between models / within series	LARGE VENUE*		
			
	EB-PU2213B	**EB-PU2216B**	**EB-PU2220B**
Product Code	V11HA68853BU	V11HA67853BU	V11HA66853BU
IMAGE			
Light Source	Laser Diode	Laser Diode	Laser Diode
Resolution	WUXGA	WUXGA	WUXGA
Colour Light Output	13,000 lm	16,000 lm	20,000 lm
White Light Output	13,000 lm	16,000 lm	20,000 lm
Native Aspect Ratio	16:10	16:10	16:10
Contrast Ratio	2,500,000:1	2,500,000:1	2,500,000:1
LD Input Power	562 W	746 W	934 W
Keystone Correction (Standard Lens)	Vertical: ±45° / Horizontal ±30°	Vertical: ±45° / Horizontal ±30°	Vertical: ±45° / Horizontal ±30°
Lens Shift (Standard Lens)	Vertical: ±60% / Horizontal: ±18%	Vertical: ±60% / Horizontal: ±18%	Vertical: ±60% / Horizontal: ±18%
OPTICAL (for Standard Lens)			
Zoom	1 – 1.6 (Optical)	1 – 1.6 (Optical)	1 – 1.6 (Optical)
Screen Size	60" to 1000"	60" to 1000"	60" to 1000"
Projection Distance	100" screen (3.37 – 5.49 m)	100" screen (3.37 m)	100" screen (3.37 m)
Throw Ratio	1.57 (Zoom: Wide) / 2.56 (Zoom: Tele)		
Focus Method	Powered	Powered	Powered
CONNECTIVITY			
Input: Video	-	-	-
Input: Computer	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB)	1 x D-sub 15-pin (RGB)
Input: Digital	1 x HDMI, 1 x DVI-D, 1 x HDBaseT		
Input: SDI	1 x BNC (3G-SDI)	1 x BNC (3G-SDI)	1 x BNC (3G-SDI)
Control: I / O	1 x RS232C, 1 x Stereo mini	1 x RS232C, 1 x Stereo mini	1 x RS232C, 1 x Stereo mini
Network: I / O	1x RJ45 (Art-Net), 1 x USB type A (for Optional Wireless LAN), 1 x USB type B (service)		
HDBaseT	Yes	Yes	Yes
Wireless Connectivity	Optional (ELPAP11)	Optional (ELPAP11)	Optional (ELPAP11)
Output: Digital	1 x BNC (3G-SDI)	1 x BNC (3G-SDI)	1 x BNC (3G-SDI)
Output: Audio	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini
ADVANCED FEATURES			
Epson Projector Management (Network & Control)	Yes	Yes	Yes
Epson Professional Tool	Yes	Yes	Yes
Remote Access Camera	Yes (with Optional ELPEC01)	Yes (with Optional ELPEC01)	Yes (with Optional ELPEC01)
Wireless LAN Enterprise Security	Yes (with Optional Wireless LAN Unit)	Yes (with Optional Wireless LAN Unit)	Yes (with Optional Wireless LAN Unit)
4K Enhancement	Yes	Yes	Yes
Fully Sealed Optical Engine	Yes	Yes	Yes
Art-Net	Yes	Yes	Yes
Lens Position Memory	Yes (10 positions)	Yes (10 positions)	Yes (10 positions)
Split Screen	Yes	Yes	Yes
Edge Blending	Yes	Yes	Yes
Scaling	Yes	Yes	Yes
Curved Screen Projection	Yes	Yes	Yes
Simple Stacking	Yes	Yes	Yes
NFC	Yes	Yes	Yes
Gamma Correction	Yes	Yes	Yes
Frame Interpolation	Yes	Yes	Yes
Super-resolution	Yes	Yes	Yes
Detail Enhancement	Yes	Yes	Yes
360 Degrees Projection	Yes	Yes	Yes
Instant Off	Yes	Yes	Yes

* PLEASE VISIT WWW.EPSON.COM.AU FOR DIMENSIONS AND WEIGHT OF ABOVE MODELS

Note: Highlighted boxes indicate step-ups between models / within series	LARGE VENUE			
				
	EB-PQ2010B	**EB-PQ2216B**	**EB-PQ2220B**	**EB-XQ2030B**
Product Code	V11HB02853	V11HB04853	V11HB05853	V11HC01853
IMAGE				
Light Source	Laser Diode	Laser Diode	Laser Diode	Laser Diode
Resolution	4K[1]	4K[1]	4K[1]	4K[1]
Colour Light Output	10,000 lm	16,000 lm	20,000 lm	30,000 lm
White Light Output	10,000 lm	16,000 lm	20,000 lm	30,000 lm
Native Aspect Ratio	16:9			
Contrast Ratio	5,000,000:1			
LD Input Power	449 W	810 W	1080 W	1557 W
Keystone Correction (Standard Lens)	Vertical: ±45° / Horizontal ±30°			
Lens Shift (Standard Lens)	Vertical: ±58% / Horizontal: ±16%			Vertical: ±64% / Horizontal: ±16%
OPTICAL (for Standard Lens)				
Zoom	1 – 1.61 (Optical)			
Screen Size	60" to 1000"			
Projection Distance	100" screen (3.35 m)			
Throw Ratio	1.52 (Zoom: Wide) / 2.47 (Zoom: Tele)			
Projection Lens F Number	1.8 - 2.3			
Projection Lens Focal Length	36 mm - 57.4 mm			
Focus Method	Powered			
CONNECTIVITY				
Input: Digital	2 x HDMI, 1 x HDBaseT, 1 x BNC (12G-SDI)			2 x HDMI, 1 x HDBaseT, 1 x BNC (12G-SDI), 1 x SDM slot (SDM-M, SDM-L)
Interface Slot	-	-	-	HDMI, UART, MDI, 12CM
Control: I / O	1 x RS232C, 1 x Stereo mini			
Network: I / O	1x RJ45 (Art-Net), 1 x USB type A (for Optional Wireless LAN)			1 x RJ45, Wireless included
USB: I/O	2 x USB Type A, 1 x USB Type B			
HDBaseT	Yes			
Wireless Connectivity	Optional (ELPAP11)			Built-in
Output: Digital	1 x HDMI, 1 x BNC (12G-SDI)			
Output: Audio	1 x Stereo mini			
ADVANCED FEATURES				
Fully Sealed Optical Engine	-	Yes	Yes	Yes
Fully Sealed Laser Light Source	-	Yes	Yes	Yes
Filterless Design	-	Yes	Yes	Yes
Lens Position Memory	Yes	Yes	Yes	Yes
Art-Net	Yes	Yes	Yes	Yes
Dust proof[2]	Yes (IPX5 rated)	Yes (IPX5 rated)	Yes (IPX5 rated)	Yes (IPX6 rated)
Scaling	Yes	Yes	Yes	Yes
Tiling	Yes	Yes	Yes	Yes
Curved Screen Projection	Yes	Yes	Yes	Yes
Simple Stacking	Yes	Yes	Yes	Yes
Simple Blending	Yes	Yes	Yes	Yes
Dynamic Contrast Synchronisation	-	-	-	Yes
NFC	Yes	Yes	Yes	Yes
External Camera ELPEC01 support	Yes	Yes	Yes	Yes
Low Latency Mode	Yes	Yes	Yes	Yes
Scene Adaptive Gamma	Yes	Yes	Yes	Yes
Frame Interpolation (4K @ 120 Hz)	Yes	Yes	Yes	Yes
Brightness Lock	Yes	Yes	Yes	Yes
Real 4K Off Function	Yes	Yes	Yes	-
Wireless LAN Enterprise Security	Yes (with Optional Wireless LAN unit)			Yes
Content Playback	Yes	Yes	Yes	Yes
360 Degrees Projection	Yes	Yes	Yes	Yes
Auto Contrast Enhancement	Yes	Yes	Yes	Yes
Auto Signal Backup Function	Yes (HDMI, SDI, HDBaseT)			Yes (TBA)
GENERAL				
Dimensions D x W x H (Including Feet)	436 x 545 x 189 mm	492 x 586 x 218 mm	492 x 586 x 218 mm	539 x 620 x 251 mm
Weight	18.8 kg	29.2 kg	29.2 kg	34.4 kg

1. 1080P WITH 2-AXIS PIXEL SHIFT TECHNOLOGY. ON SCREEN PIXELS = 8,294,400 DOTS (1,920 X 1,080 X 4).
2. IP6X certification pending. IP certified in accordance with IEC Standard 60529. The IP certification is applied to the optical engine and light source module.

Note: Highlighted boxes indicate step-ups between models / within series	LIGHTING		ULTRA-SHORT THROW HOME	
				
	EV-110	**EV-115**	**EH-LS670B**	**EH-LS970B**
Product Code	V11HA22053	V11HA22153	V11HB82153	V11HB83153
IMAGE				
Light Source	Laser Diode	Laser Diode	Laser diode	Laser diode
Resolution	WXGA	WXGA	4K PRO UHD[1]	4K[1] (8.3 M pixels on screen)
Colour Light Output	2,200 lm	2,200 lm	3,600 lm	4,000 lm
White Light Output	2,200 lm	2,200 lm	3,600 lm	4,000 lm
Native Aspect Ratio	16:10	16:10	16:9	16:9
Contrast Ratio	2,500,000:1	2,500,000:1	5,000,000:1	5,000,000:1
Keystone Correction (Standard Lens)	Vertical: ±45° Horizontal: ±40°	Vertical: ±45° Horizontal: ±40°	-	-
Colour Processing	10-bit	10-bit	10-bit	10-bit
OPTICAL (for Standard Lens)				
Zoom	Total: 1 – 2.2 (Optical: 1 – 1.58, Digital: 1 – 1.4)		1 – 2.5 (Digital)	1 – 2.5 (Digital)
Screen Size	30" to 150"	30" to 150"	60" to 120"	80" to 150"
Projection Distance	60" screen (1.79 m)	60" screen (1.79 m)	77" screen (0.43 m)	90" screen (0.32 m)
Throw Ratio	1.38 (Zoom: Wide) / 2.19 (Zoom: Tele)		0.25 (Zoom: Wide) / 0.62 (Zoom: Tele)	0.16 (Zoom: Wide) / 0.40 (Zoom: Tele)
Focus Method	Powered	Powered	Manual	Manual
CONNECTIVITY				
Input: Digital	1 x HDMI	1 x HDMI	3 x HDMI (1 x eARC)	3 x HDMI (1 x eARC)
Input: SD Card	1 x SDHC, up to 32 GB		-	-
USB: I / O	1 x USB type A zoom A (Power Supply)	1 x USB type A zoom A (Power Supply)	2 x USB type A (for PC free & firmware update), 1x USB type B (firmware update)	2 x USB type A (for PC free & firmware update), 1x USB type B (firmware update)
Control	1 x USB type A for GPI	1 x USB type A for GPI	-	-
Network: I / O	1 x RJ45	1 x RJ45	-	-
Wireless Connectivity	Included	Included	Included	Included
Output: Audio	1 x Stereo mini	1 x Stereo mini	1 x stereo mini, 1 x S/PDIF	1 x stereo mini, 1 x S/PDIF
ADVANCED FEATURES				
Epson Projector Management (Network & Control)	Yes	Yes	-	-
Edge Blending	Yes	Yes	-	-
Built-in Speaker	-	-	Sound by Bose[2] (20 W)	Sound by Bose[2] (20 W)
AI Super Resolution	-	-	Yes	Yes
AI PQ	-	-	Yes	Yes
De-counter	-	-	Yes	Yes
High Dynamic Range - HDR10	-	-	Yes	Yes
Hybrid Log Gamma - HLG	-	-	Yes	Yes
4K Enhancement	-	-	Yes	Yes
Frame Interpolation	-	-	Yes	Yes
Google TV[3]	-	-	Yes (built-in)	Yes (built-in)
Contrast Enhancement	-	-	Yes (Auto Contrast)	Yes (Local Contrast)
Scene Adaptive Gamma	-	-	Yes	Yes
Colour Modes	Dynamic, Normal		Dynamic, Vivid, Cinema, Natural	Cinema, dialogue, music, standard
Security	Password protect function		Kensington-style lock provision	
GENERAL				
Dimensions D x W x H (Including Feet)	Projection unit: 175 x D265 Power supply unit: 110 x 459 x 65 mm (with Cable Cover)		400 x 467 x 153 mm	341 x 695 x 156 mm
Weight	6.9 kg	6.9 kg	7.4 kg	12.4 kg
Power Consumption (Normal)	-	-	254 W	347 W
Power Consumption (Standby)	170 W	170 W	2 W	2 W
Noise Level (Normal/Eco)	34 / 22 dB	34 / 22 dB	29 / 20 dB	29 / 18 dB

1. 4K RESOLUTION ENHANCEMENT TECHNOLOGY SHIFTS EACH PIXEL TO PRODUCE AN IMAGE ON SCREEN, UP TO THE STATED SPECIFICATION.
2. SOUND BY BOSE IS A TRADEMARK OF BOSE CORPORATION USED UNDER LICENSE BY EPSON.
3. GOOGLE TV IS THE NAME OF THIS DEVICE'S SOFTWARE EXPERIENCE AND A TRADEMARK OF GOOGLE LLC, GOOGLE, YOUTUBE AND YOUTUBE MUSIC ARE TRADEMARKS OF GOOGLE LLC

Note: Highlighted boxes indicate step-ups between models / within series	EVERYDAY HOME THEATRE	
		
	CO-FH02	**EH-TW850**
Product Code	V11HA85053	V11HB61053
IMAGE		
Light Source	Lamp	Lamp
Resolution	Full HD	Full HD
Colour Light Output	3,000 lumens	3,400 lumens
White Light Output	3,000 lumens	3,400 lumens
Native Aspect Ratio	16:9	16:9
Contrast Ratio	350:1	16,000:1
Lamp Type	188 W UHE	210 W UHE
Keystone Correction (Standard Lens)	Vertical: ±30° / Horizontal ±30°	Vertical: ±30° / Horizontal ±30°
Colour Processing	8-bit	8-bit
OPTICAL (for Standard Lens)		
Zoom	1–1.35 (Digital)	1–1.2 (Optical)
Screen Size	26" to 391"	31" to 305"
Projection Distance	60" screen (1.58 m)	60" screen (1.35 - 1.64 m)
Throw Ratio	1.19 (Zoom: Wide), 1.61 (Zoom: Tele)	1.00 (Zoom: Wide), 1.21 (Zoom: Tele)
Focus Method	Manual	Manual
CONNECTIVITY		
Input: Digital	1 x HDMI	2 x HDMI
USB: I / O	1 x USB type A (Power Supply, Firmware Update, copy OSD settings), 1 x USB type B (firmware update)	1 x USB type A (Wireless LAN, Firmware Update, copy OSD settings), 1 x USB type B (firmware update)
Wireless Connectivity	Included (via SMP)	Included
Output: Audio	-	1 x Stereo mini
ADVANCED FEATURES		
Built-in Speaker	5 W	2 W
Epson Projector Management (Network & Control)	-	Yes
Epson iProjection (Multi-PC Projection)	-	Yes
Miracast	-	Yes
Airplay	-	Yes
Scene Adaptive Gamma	Yes	Yes
Detail Enhancement	-	Yes
Smart Media Player	Yes	-
Security	Kensington-style lock provision & padlock	
GENERAL		
Dimensions D x W x H (Including Feet)	211 x 320 x 87 mm	252 x 302 x 92 mm
Weight	2.6 kg	2.8 kg
Lamp Life (Normal / Eco)	6,000 h / 12,000 h	6,000 h / 12,000 h
Power Consumption (Normal)	270 W	332 W
Noise Level (Normal/Eco)	37 / 29 dB	37 / 28 dB

Note: Highlighted boxes indicate step-ups between models / within series	SMART MINI HOME THEATRE	
		
	EF-62B	**EF-73**
Product Code	V11HB73153	V11HC16853
IMAGE		
Light Source	LED	LED
Resolution	4K PRO UHD[1]	4K PRO UHD[1]
Colour Light Output	700 lm	1,000 lm
White Light Output	700 lm	1,000 lm
Native Aspect Ratio	16:9	16:9
Contrast Ratio	5,000,000:1	5,000,000:1
Colour Processing	Full 10 bit	Full 10 bit
OPTICAL (for Standard Lens)		
Zoom	1.0 - 3.33	1.0 - 3.33
Screen Size	30" to 150"	30" to 150"
Projection Distance	60" screen (1.59 m)	60" screen (1.59 m)
Throw Ratio	1.2	1.2
Focus Method	Auto	Auto
CONNECTIVITY		
Input: Digital	1x HDMI (eARC / ARC)	1x HDMI (eARC / ARC)
USB: I / O	1 x USB type A (firmware update) 1 x USB type B (firmware update)	1 x USB type A (firmware update) 1 x USB type B (firmware update), 1 x USB type C
Wireless Connectivity	Included	Included
Output: Audio	1 x Stereo mini	1 x Stereo mini
ADVANCED FEATURES		
Built-In Speakers	Sound by Bose[2]	Sound by Bose[2]
Sound Output	2x 5 W	2x 5 W
Auto Wall Colour Adjustment	Yes	Yes
Auto Keystone Correction	Yes	Yes
Screen Fit	Yes	Yes
Auto Focus	Yes	Yes
Auto Obstacle Avoidance	Yes	Yes
Smart Eye Protection	Yes	Yes
Scene Adaptive Gamma	Yes	Yes
Hybrid Log Gamma (HLG)	Yes	Yes
Frame Interpolation	Yes	Yes
HDR10	Yes	Yes
AutoLow Latency Mode	Yes	Yes
Built-in Gimbal Stand	No	Yes
Ambient Lighting	No	Yes
Wireless Charging	No	Yes
Google TV[3]	Yes (Built-in)	
Sound Modes	Cinema, dialogue, music, standard	
Colour Modes	Dynamic, vivid, cinema, natural	
GENERAL		
Dimensions D x W x H (Including Feet)	190 x 199 x 75 mm	198 x 190 x 251 mm
Weight	1.6 kg	3.9 kg
Power Consumption (Normal)	95 W	135 W
Power Consumption (Standby)	2 W	2 W
Noise Level (Normal/Eco)	24 / 20 dB	28 / 23 dB

1. 4K RESOLUTION ENHANCEMENT TECHNOLOGY SHIFTS EACH PIXEL TO PRODUCE AN IMAGE ON SCREEN, UP TO THE STATED SPECIFICATION.
2. SOUND BY BOSE IS A TRADEMARK OF BOSE CORPORATION USED UNDER LICENSE BY EPSON.
3. GOOGLE TV IS THE NAME OF THIS DEVICE'S SOFTWARE EXPERIENCE AND A TRADEMARK OF GOOGLE LLC, GOOGLE, YOUTUBE AND YOUTUBE MUSIC ARE TRADEMARKS OF GOOGLE LLC

Note: Highlighted boxes indicate step-ups between models / within series	4K HOME THEATRE				
					
	EH-TW6250	**EH-TW7100**	**EH-TW9400**	**EH-LS9000B**	**EH-LS12000B**
Product Code	V11HA73053	V11H959053	V11H928053	V11HC13153	V11HA47053
IMAGE					
Light Source	Lamp	Lamp	Lamp	Laser diode	Laser diode
Resolution	4K Enhancement[1] (1920 x 1080 x 2)	4K Enhancement[1] (1920 x 1080 x 2)	4K Enhancement[1] (1920 x 1080 x 2)	4K[1] (8.3 M pixels on screen)	4K[1] (8.3 M pixels on screen)
Colour Light Output	2,800 lm	3,000 lm	2,600 lm	2,200 lm	2,700 lm
White Light Output	2,800 lm	3,000 lm	2,600 lm	2,200 lm	2,700 lm
Native Aspect Ratio	16:9	16:9	16:9	16:9	16:9
Contrast Ratio	35,000:1	100,000:1	1,200,000:1	2,500,000:1	2,500,000:1
Lamp Type	200 W UHE	250 W UHE	250 W UHE	Laser diode	Laser diode
Keystone Correction (Standard Lens)	Vertical: ±30° Horizontal: ±30°	Vertical: ±30° Horizontal: ±30°	Vertical: ±30°	Vertical: ±30° / Horizontal ±30°	Vertical: ±30° Horizontal: ±30°
Lens Shift	Vertical: ±60%	Vertical: ±60% Horizontal: ±24%	Vertical: ±96.3% Horizontal: ±47.1%	Vertical: ±96.3% Horizontal: ±24%	Vertical: ±96.3% Horizontal: ±47.1%
Colour Processing	10-bit	10-bit	10-bit	10-bit	10-bit
Advanced Image Processing	-	-	Yes	Yes	Yes
OPTICAL (for Standard Lens)					
Zoom	1 – 1.62 (Optical)	1 – 1.6 (Optical)	1 – 2.1 (Optical)	1 - 2.1 (Optical)	1 – 2.1 (Optical)
Screen Size	40" to 500"	40" to 500"	50" to 300"	50" to 300"	50" to 300"
Projection Distance	80" screen (2.34 – 3.81 m)	100" screen (2.95 – 4.77 m)	100" screen (3 – 6.3 m)	100" screen (3.0 – 6.3 m)	100" screen (3.0 – 6.3 m)
Throw Ratio	1.32 (Zoom: Wide) 2.15 (Zoom: Tele)	1.32 (Zoom: Wide) 2.15 (Zoom: Tele)	1.35 (Zoom: Wide) 2.84 (Zoom: Tele)	1.35 (Zoom: Wide) 2.84 (Zoom: Tele)	1.35 (Zoom: Wide) 2.84 (Zoom: Tele)
Focus Method	Manual	Manual	Powered	Powered	Powered
CONNECTIVITY					
Input: Video	1 x HDMI	2 x HDMI	2x HDMI 1x D-sub 15-pin (RGB)	2 x HDMI (HDCP2.3) (HDMI2 supports eARC/ARC)	2 x HDMI (HDCP2.3) (HDMI2 supports eARC/ARC)
USB: I / O	1 x USB mini B (service)	1 x USB type A (Power Supply, Firmware Update), 1 x USB B mini (service)	2 x USB type A, 1 x USB B mini (service)	2 x USB A, 1 x USB B (firmware update, copy OSD settings)	2 x USB type A (1x Opt. HDMI) / 1 x USB B mini (service)
Control	-	1 x RS232C, 1 x Stereo mini	1 x RS232C	1 x RS232c, 1 x Stereo Mini	1 x RS232C
Network: I / O	-	1 x USB type A (for Optional Wireless LAN)	1 x RJ45, 1 x USB type A (for Optional Wireless LAN)	1 x RJ45	1 x RJ45
Wireless Connectivity	Included (via SMP)	Optional (ELPAP10)	Optional (ELPAP10)	-	-
Output: Audio	1 x Stereo mini	1 x Stereo mini	1 x Stereo mini	-	1 x Stereo mini
ADVANCED FEATURES					
Built-in Speaker	10 W	2 x 10 W	-	-	-
Super Resolution	-	-	Yes	Yes (4K compatible)	Yes (4K compatible)
High Dynamic Range	Yes	Yes	Yes (HDR 10)	Yes (HDR 10+)	Yes (HDR 10+)
Hybrid Log Gamma - HLG	-	-	Yes	Yes	Yes
4K Enhancement*	Yes	Yes	Yes	Yes	Yes
Frame Interpolation	Yes	Yes	Yes	Yes (up to 4K, 60 FPS)	Yes (up to 4K 60 FPS)
Smart Media Player	Yes	-	-	Optional (ELPAP12)	Optional (ELPAP12)
Auto Contrast Enhancement	-	-	-	Yes	Yes
Scene Adaptive Gamma	Yes	-	-	Yes	Yes
Direct Power On	Yes	Yes	Yes	Yes	Yes
Dynamic Tone Mapping	-	-	-	Yes	Yes
Security	Kensington-style lock provision & padlock			Kensington-style lock provision	
Colour Modes	Dynamic, Vivid, Natural, Cinema	Dynamic, Bright Cinema, Natural, Cinema	2D: Dynamic, Bright Cinema, Natural Cinema, Digital Cinema 3D: 3D Dynamic, 3D Cinema	Dynamic, Bright Cinema, Cinema, Natural, Vivid	Dynamic, Bright Cinema, Cinema, Natural, Vivid
GENERAL					
Dimensions D x W x H (Including Feet)	275 x 333 x 131 mm	330 x 410 x 164 mm	450 x 520 x 192.7 mm	447 x 520 x 193 mm	447 x 520 x 192.7 mm
Weight	4.1 kg	6.9 kg	11.2 kg	12.7 kg	12.7 kg
Power Consumption (Normal)	301 W	406 W	298 W	302 W	302 W
Power Consumption (Standby)	-	2 W	2 W	2 W	2 W
Noise Level (Normal/Eco)	36 / 28 dB	35 / 24 dB	31 / 20 dB	30 / 22 dB	30 / 22 dB

1. 4K RESOLUTION ENHANCEMENT TECHNOLOGY SHIFTS EACH PIXEL TO PRODUCE AN IMAGE ON SCREEN, UP TO THE STATED SPECIFICATION.

Note: Highlighted boxes indicate step-ups between models / within series	PREMIUM HOME THEATRE	
		
	EH-QL3000W	**EH-QL3000B**
Product Code	V11HB34953	V11HB34853
IMAGE		
Light Source	Laser diode	
Resolution	4K[1] (3840 x 2160) (8.3 M pixels on screen)	
Colour Light Output	6,000 lumens	
White Light Output	6,000 lumens	
Native Aspect Ratio	16:9	
Contrast Ratio	5,000,000:1	
Keystone Correction (Standard Lens)	Vertical: ±45% / Horizontal: ±30%	
Colour Processing	10-bit	
OPTICAL (for Standard Lens)		
Zoom	1 – 1.61 (Optical)	
Screen Size	60" to 1000"	
Projection Distance	100" screen (3.35 m)	
Throw Ratio	1.52 (Zoom: Wide), 2.47 (Zoom: Tele)	
Focus Method	Powered	
Interchangeable Lens	Yes	
CONNECTIVITY		
Input: Digital	2 x HDMI (HDCP 2.3)	
USB: I / O	2 x USB A (for ELPAP12, firmware update, copy OSD settings, or 5V/2A power supply, content playback, 1 x USB B for Firmware Update, copy OSD settings)	
Control	1 x RS232c	
Network: I / O	1 x RJ45	
Output: Audio	1 x Stereo mini	
ADVANCED FEATURES		
Content Playback	Yes	
Dynamic Tone Mapping	Yes	
High Dynamic Range – HDR10	Yes	
Hybrid Log Gamma – HLG	Yes	
Advanced Image Processing	Yes	
Super Resolution	Yes (4K compatible)	
Frame Interpolation	Yes (up to 4K 60 fps)	
Auto Contrast Enhancement	Yes	
Scene Adaptive Gamma	Yes	
ALLM support (Auto Low Latency Mode)	Yes (4K at 120 fps)	
AV Mute	Yes	
Direct Power On	Yes	
Security	Kensington-style lock provision, lens lock	
Colour Modes	Dynamic, Vivid, Cinema, Natural	
Lens Position Memory	10 positions	
Industry / Partner Standard	Crestron Connected V2, Crestron Integrated Partner, Control4, AMX, PJLink	
GENERAL		
Dimensions D x W x H (Including Feet)	568 x 568 x 192 mm	
Weight	21.1 kg	
Power Consumption (Normal)	437 W	
Power Consumption (Standby)	2 W	
Noise Level (Normal)	28 dB	

1. 4K RESOLUTION ENHANCEMENT TECHNOLOGY SHIFTS EACH PIXEL TO PRODUCE AN IMAGE ON SCREEN, UP TO THE STATED SPECIFICATION.

OPTIONAL LENSES

EB-XQ2030B new H series lens*


Lens Type	Mid-Throw	Mid-Throw	Mid-Throw	Wide-Throw	Wide-Throw	Ultra-Short Throw	Short-Throw	Short-Throw	Short-Throw	Long-Throw
Reference	ELPLM10H	ELPLM11H	ELPLM15H	ELPLW06H	ELPLW08H	ELPLX04H	ELPLU06H	ELPLU07H	ELPLU04H	ELPLL11H
Order Number	V12H004M0G	V12H004M0H	V12H004M0J	V12H004W09	V12H004W0A	V12H004X04	V12H004U08	V12H004U09	V12H004U07	V12H004L0B
Throw Ratio	2.34 - 3.59:1	3.42 - 5.23:1	1.52 - 2.47:1	1.15 - 1.57:1	0.83 - 1.17:1	0.39 - 0.49:1	0.39 - 0.49:1	0.46 - 0.621:1	0.62 - 0.87:1	6.99 - 11:1

*New lenses will be compatible with the PU1000 Series, PU2000 Series, and PQ2000 Series through firmware updates.

EB-PU/PQ Series

Lens Type	Ultra-Short-Throw	Ultra-Short-Throw	Short-Throw	Short-Throw	Wide-Throw	Wide-Throw	Wide-Throw	Mid-Throw	Mid-Throw	Mid-Throw	Mid-Throw	Long-Throw
Reference	ELPLX01S	ELPLX02S	ELPLU03S	ELPLU04	ELPLW05	ELPLW06	ELPLW08	ELPLM08	ELPLM15	ELPLM10	ELPLM11	ELPLL08
Order Number	VI2H004X01	VI2H004X02	VI2H004UA3	VI2H004U04	VI2H004W05	VI2H004W06	VI2H004W08	VI2H004M08	VI2H004M08	VI2H004M0A	VI2H004M0B	VI2H004L08
Throw Ratio	0.35:1	-	0.65 – 0.78:1	0.87 – 1.06:1	1.04 – 1.46:1	1.63 – 2.22:1	1.18 – 1.66:1	1.45 – 2.32:1	2.15 – 3.49:1	3.31 – 5.07:1	4.48 – 7.39:1	7.2 – 10.12:1
PU2213B / PU2216B / PU2220B	-	0.35:1	0.48 – 0.57:1	0.64 – 0.78:1	0.77 – 1.07:1	1.19 – 1.63:1	0.86 – 1.21:1	1.08 – 1.72:1	1.58 – 2.56:1	2.43 – 3.71:1	3.54 – 5.41:1	5.27 – 7.41:1

OPTIONS AND ACCESSORIES



Air Filters

Regularly replace the air filter in your Epson projector in order to maintain image quality and to ensure longevity.



Lamps

Order genuine Epson lamps to ensure that you achieve the best possible image quality and colour reproduction.



Speakers

Enhance the audio experience with the Epson ELP-SP02 powered speaker set.



Control Pad

A simple cable management solution from Epson. Ideal for classrooms and meeting spaces.



Streaming Media Player

Stream your favourite content with the ELPAP12.



Portable Screen

Epson portable, light weight 120 inch screen is the perfect display solution for your home or office.



Ceiling Mounts

Ceiling mounts to suit all models of Epson projectors.



Wireless LAN Adapter

A simple yet powerful solution to enabling wireless connectivity to your Epson projector (optional models only).

Epson is the registered trademark of Seiko Epson Corporation. All other names and company names used herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Specifications are subject to change without notice.

Epson Australia Pty Ltd
www.epson.com.au

ABN: 91 002 625 783

Epson New Zealand
www.epson.co.nz

08/2026

EPSON